

TOL-39hUBdK3s


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-39hUBdK3s	InGaN/GaN	Blue	Blue Diffused

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 3*4*6mm diameter package.
- Long life, stable and reliable.
- RoHS compliant.

Dimensions

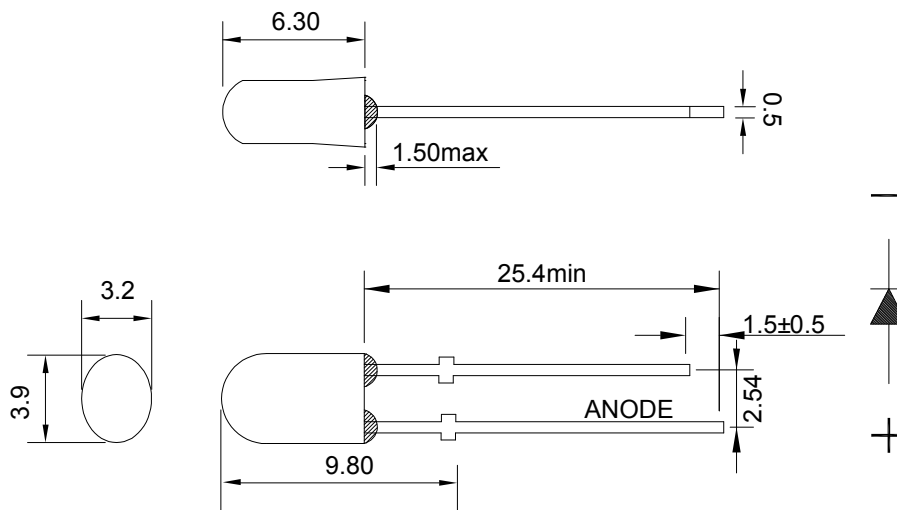

Notes:

1. All dimensions are in millimeter.
2. Tolerance is ± 0.25 mm unless otherwise noted.

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	80	mA
Power Dissipation	75	mW
Continuous Forward Current	25	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +100°C	
Wave Soldering Profile For Lead-free Soldering	260°C for 5 Sec	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	252	316	493	mcd	I _F =20mA
Viewing Angle	2θ _{1/2}		80/45		deg	I _F =20mA
Dominant Wavelength	λ _d		470		nm	I _F =20mA
Spectral Line Half-Width	Δλ		15		nm	I _F =20mA
Forward Voltage	V _F		3.0		V	I _F =20mA
Reverse Current	I _R			<10	μA	V _R =5V

* Please refer to CIE 1931 chromaticity diagram.

Bin Code List for Reference

Luminous Intensity		Unit : mcd@20mA	
Bin Code	Min	Max	
B34	252	316	
B35	316	394	
B36	394	493	

Tolerance of Luminous Intensity on each bin is ±11%

Dominant Wavelength		Unit : nm@20mA
Bin Code	Min	Max
23	464	466
24	466	468
25	468	470
26	470	472
27	472	474

Tolerance of Dominant Wavelength on each bin is ± 1 nm

Forward Voltage		Unit : V@20mA
Bin Code	Min	Max
V10	2.8	3.0
V11	3.0	3.2
V12	3.2	3.4
V13	3.4	3.6

Tolerance for each Forward Voltage Bin is ± 0.1 V