



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specifications Approval Sheet

Product Description: 314.68 MHz SMD 3.0 x 3.0 mm SAW Resonator

TST Parts No.: TC0661A

Customer Parts No.: \_\_\_\_\_

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: \_\_\_\_\_ Hong Pu Lin *Hong Pu Lin*

Approval by: \_\_\_\_\_ Andy Yu *Andy Yu*

Date: \_\_\_\_\_ 2019/04/25

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



# TAI-SAW TECHNOLOGY CO., LTD.

No.3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales3@mail.taisaw.com](mailto:tstsales3@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

SAW Resonator 314.68MHz (SMD 3.0x3.0mm)

MODEL NO.: TC0661A

REV. NO.2.0

## A. FEATURES:

1. 1-port Resonator.

RoHS Compliant  
Lead free  
Lead-free soldering

## B. MAXIMUM RATING:

1. Input Power Level : 0 dBm
2. DC Voltage : 0V
3. Operating temperature range: -40 °C to +125 °C
4. Storage temperature range: -40 °C to +125 °C
5. Moisture Sensitive Level: Level 1 (MSL1)

Electrostatic Sensitive Device

## C. ELECTRICAL CHARACTERISTICS:

Reference Temperature  $T_A=25^{\circ}\text{C}$


Item	Unit	Min.	Type.	Max.
Center Frequency*, <b>Fc</b>	<b>MHz</b>	314.58	314.68	314.78
Insertion Loss <b>IL</b>	<b>dB</b>	-	1.6	2.0
Equivalent Elements				
Unload Q Factor	-	8000	9880	-
Motional Capacitance <b>C1</b>	<b>fF</b>	-	3.12	-
Motional Inductance <b>L1</b>	<b>μH</b>	-	81.84	-
Motional Resistance <b>R1</b>	<b>Ohm</b>	-	16.37	-
Parallel Capacitance <b>Co</b>	<b>pF</b>	-	<b>3.34</b>	
Frequency Temperature Coefficient**	<b>ppm/°C<sup>2</sup></b>	-	-0.032	-
Turnover To	<b>Deg.C</b>	45	55	65
Package Size		SMD 3.0x3.0 mm		

\* Frequency define by  $Y_r(\text{real})$  peak at room temperature.


\*\*Temperature dependence of  $f_c$ :  $f_c(T_A)=f_c(T_O)(1-TC_f(T_A-T_O)^2)$

## D. EQUIVIRENT CIRCUIT:


One-Port Resonator:

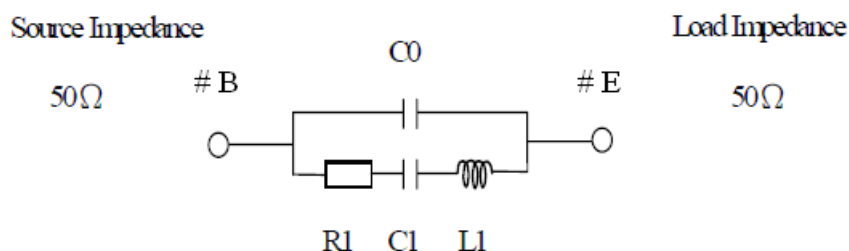


## E. FREQUENCY CHARACTERISTICS:

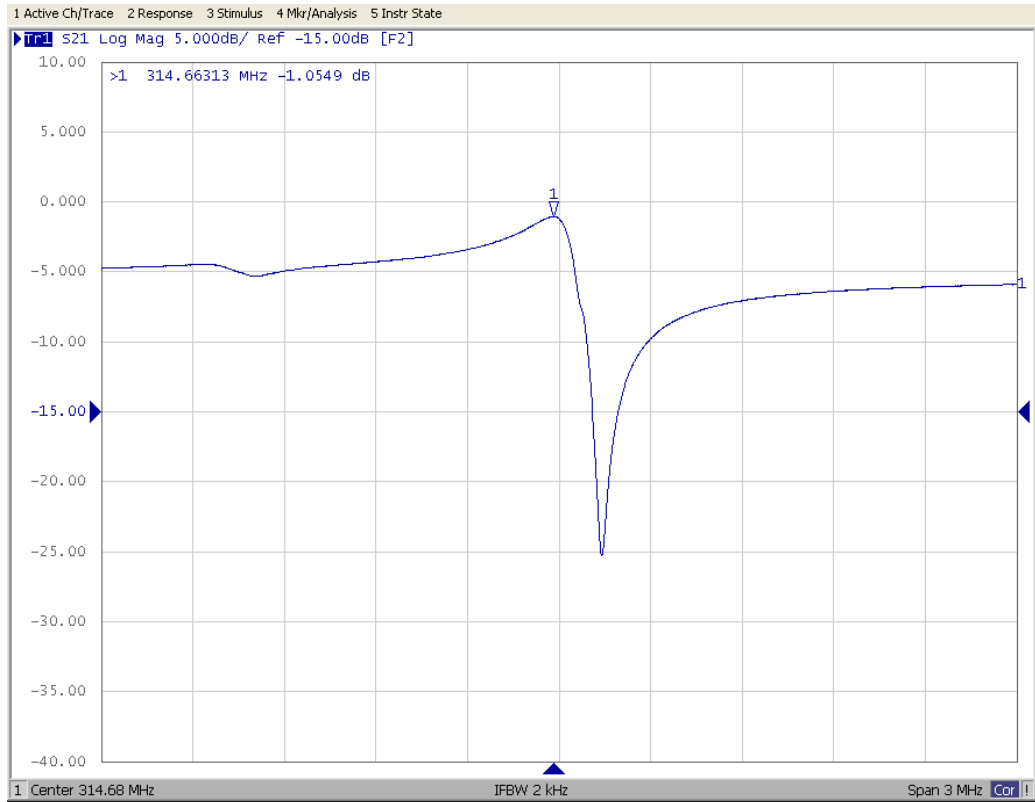

## F. TEST CIRCUIT:

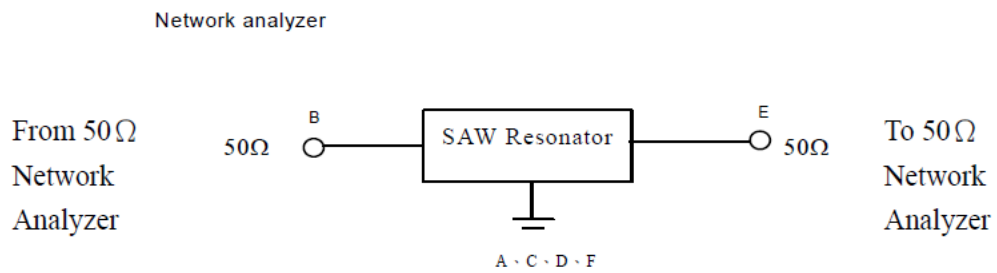

**E. OUTLINE DRAWING:**

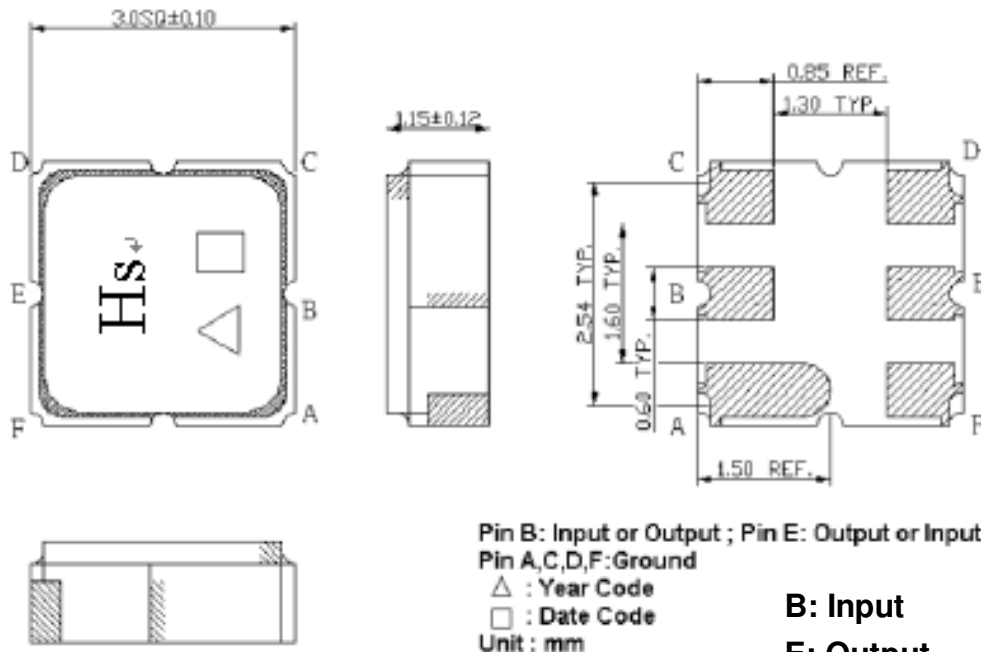


Pin B: Input or Output ; Pin E: Output or Input  
 Pin A,C,D,F: Ground  
 △ : Year Code  
 □ : Date Code  
 Unit : mm

**B: Input**  
**E: Output**  
**A, C, D, F: Ground**  
**Unit: mm**

△ : Year Code (2009->9, 2010->0, ..., 2018->8)  
 □ : Date Code (Follow the table from planner each year)


WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

**F. PCB FOOTPRINT:**

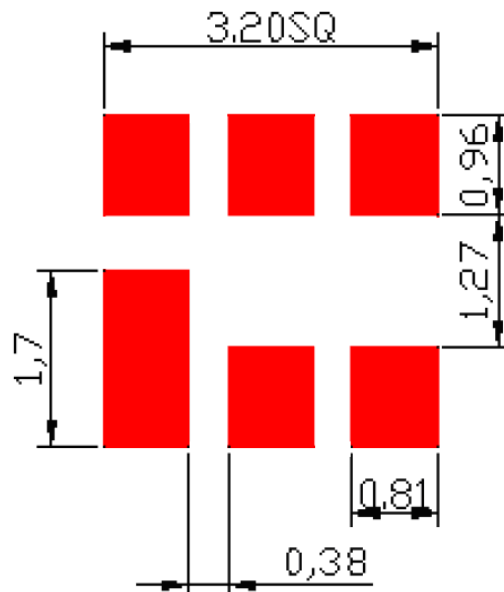


**G. PACKING:**

1. REEL DIMENSION (Please refer to FR-75D10 for packing quantity)

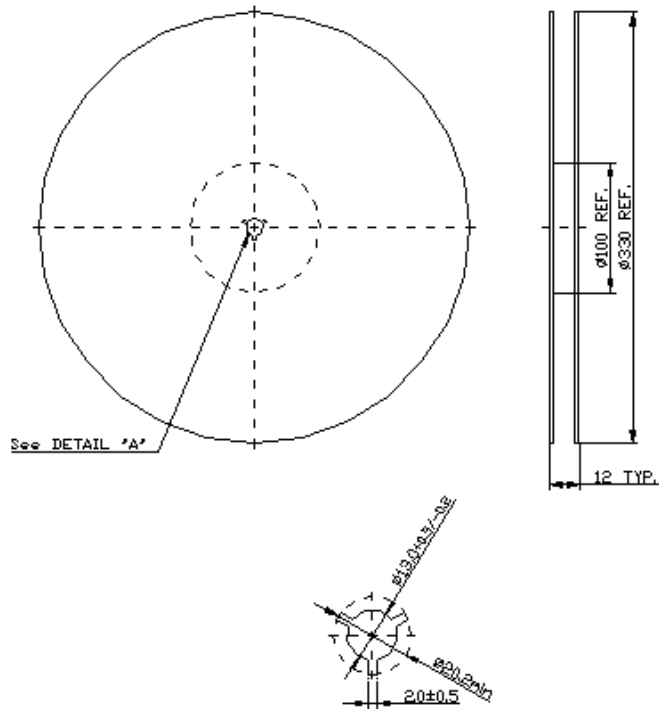

2. TAPE DIMENSION

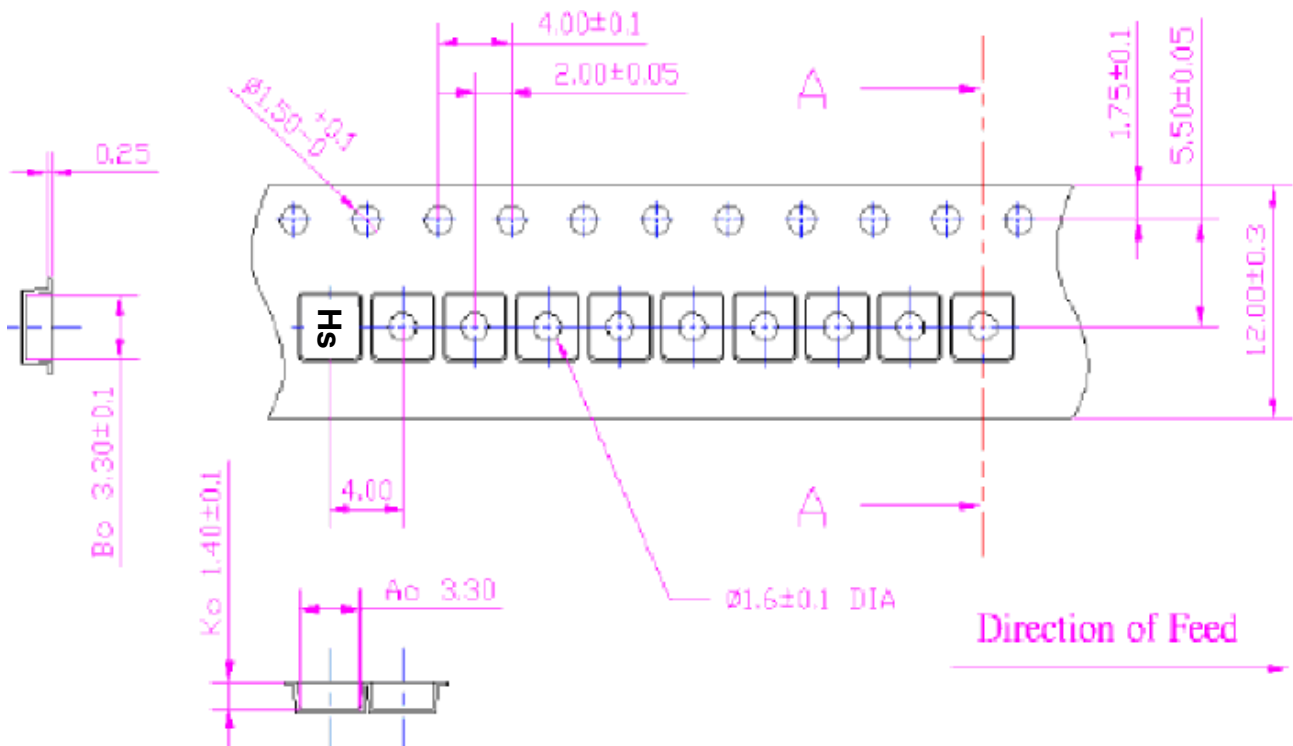

## H. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (20~40sec).
4. Time: 2 times.

