




HSF

NOTES:

Current Rating: 0.75AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T Or LCP+30%GF UL94V-0



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

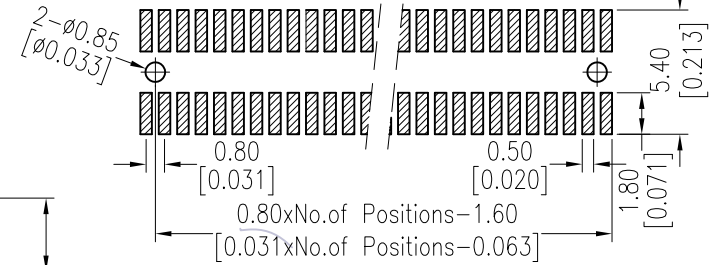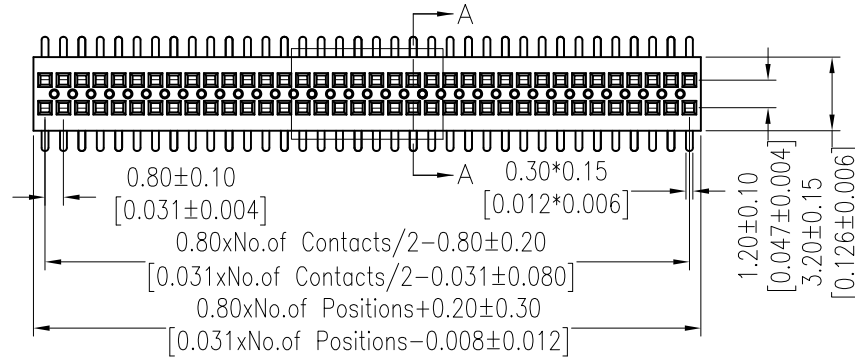

Ordering Information

2631-2 XX M XX XTN X X

No. of Pins per Row: 02-50Pin
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Insulator Material: C=PA9T, D=LCP
 Packing: T=Tube, P=Tube+CAP, R=Tape&Reel+CAP
 Series No. 1=Type 1, 2=Type 2

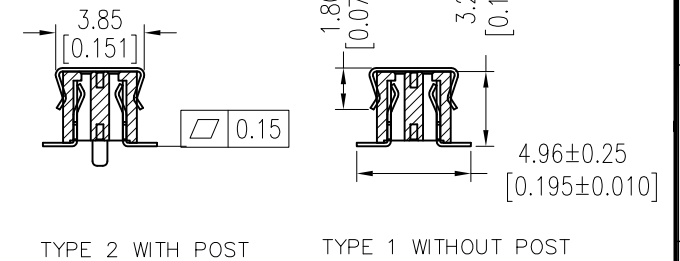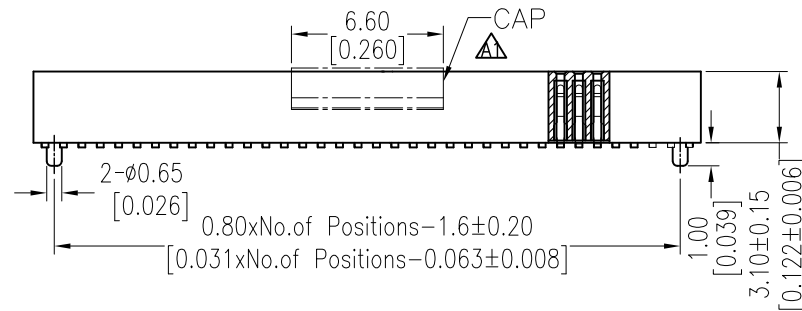

SECTION: A-A

| Item | Pitch | Mating |
|-----------|-------|--------|
| Standard | 1.27 | 1614 |
| Alternate | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----|------------|--------------------------|--------|-------------|-----------|------------|-------|-----|------------------|
| A2 | 2016/09/21 | ADD note | ----- | x.x ±0.40 | Surong Xu | 2016/09/21 | UNIT | mm | 2631-2XXMXXXTNXX |
| A1 | 2014/12/30 | Modify CAP | ----- | x.xx ±0.25 | CHECK | DATE | SIZE | A4 | |
| A0 | 2012/07/05 | NEW | ----- | x.xxx ±0.15 | APPROVE | DATE | SHEET | 1/1 | |
| | | | | Angle ± 3' | | | PROJ. | | |
| | | | | DIM TOL | | | | | Customer NO. |

| TITLE: | Customer NO. |
|----------------------------|--------------|
| FHO.80 DUAL ROW SMT H=3.10 | |