

**SPEC. NO.:** PS-51503-XXXXX-XXX

**REVISION:** P

**PRODUCT NAME:** 0.5/0.8/1.0MM PITCH EASY ON FPC CONN.

SMT R/A BOTTOM CONTACT TYPE

**PRODUCT NO:** 51502 / 51503 / 51530/ 51533 / 51639 SERIES

51540/ 51550 /51561/51574/ 51586 /51575 SERIES

51569/51570/51581/51605 /51678 /51686/52500SERIES

PREPARED:	CHECKED:	APPROVED:
DATE: <b>2021/01/20</b>	DATE: <b>2021/01/20</b>	DATE: <b>2021/01/20</b>

**TITLE: 0.5/0.8/1.0MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: **2021/01/20**

REVISION: P

ECN No: **ECN-001592**

PAGE: **2** OF **10**

1	REVISION HISTORY .....	3
2	SCOPE.....	4
3	APPLICABLE DOCUMENTS .....	4
4	REQUIREMENTS .....	4
5	PERFORMANCE .....	5
6	INFRARED REFLOW CONDITION.....	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9
8	INSTRUCTION UPON USAGE .....	10

Aces P/N: **51503 series**

TITLE: **0.5/0.8/1.0MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: **2021/01/20**

REVISION: P

ECN No: **ECN-001592**

PAGE: **3** OF **10**

## 1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
1	ECN-1006010	FOR APD990120(51503 SERIES)	RYAN	2010/06/01
2	ECN-1101197	FOR APD990334&APD1000012 ADD 51502&51530 SERIES	RYAN	2011/01/24
3	ECN-1103097	FOR APD1000081 ADD 51533 SERIES	HUANTY	2011/03/17
O	ECN-1106036	RELEASE	HUANTY	2011/06/02
A	ECN-1106229	FOR APD1000152 ADD 51540 SERIES	HUANTY	2011/06/16
B	ECN-1110304	FOR APD1000403 ADD 51550 SERIES	HUANTY	2011/10/26
C	ECN-1206014	FOR APD1010218 ADD 51561 SERIES	RYAN	2012/06/14
D	ECN-1208163	FOR APD1010443 ADD 51574 SERIES	GAVIN	2012/08/22
E	ECN-1211144	FOR APD1010559 ADD 51586 SERIES	GAVIN	2012/11/12
F	ECN-1212175	FOR APD 1010512 ADD 51581 SERIES	WAN.BO	2012/12/11
G	ECN-1307460	FOR APD1020119 ADD 51605 SERIES	WAN.BO	2013/07/25
H	ECN-1401127	ADD Working voltage	YANGYANG	2014/01/10
J	ECN-1501117	FOR <u>APD1030223</u> ADD 51639 SERIES	COCOYU	2015/01/08
K	ECN-1507163	FOR APD1010446 ADD 51575 SERIES	COCOYU	2015/07/14
L	ECN-1510259	FOR APD1040146 ADD 51678 SERIES	XUBIN	2015/10/22
M	ECN-1512380	FOR APD1040296 ADD 51686 SERIES UPDATE TEST GROUP	XUBIN	2015/12/25
N	ECN-2006149	FOR APP1090228 ADD Salt Spray: Gold plating 3 u"	SUNYAJIE	2020/05/27
P	ECN-001592	ADD Salt Spray (Gold plating 1 u" for 8 hours).	GUOEI	2021/01/20

TITLE: **0.5/0.8/1.0MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: **2021/01/20**

REVISION: P

ECN No: **ECN-001592**

PAGE: **4** OF **10**

## 2 SCOPE

This specification covers performance, tests and quality requirements for  
**0.5/0.8/1.0MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

## 3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

## 4 REQUIREMENTS

### 4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

### 4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy (**Phosphor Bronze**)  
Finish: (a) Contact Area: **Refer to the drawing.**  
(b) Under plate: **Refer to the drawing.**  
(c) Solder area: **Refer to the drawing.**
- 4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., **UL94V-0**
- 4.2.3 Actuator: Thermoplastic or Thermoplastic High Temp., **UL94V-0**
- 4.2.4 Fitting Nail: **Copper Alloy, Finish: Refer to the drawing.**

### 4.3 Ratings

- 4.3.1 Working voltage less than 36 volts AC (per pin)
- 4.3.2 Voltage: **50 Volts AC (per pin)**
- 4.3.3 Current: **0.5 Amperes (per pin)**
- 4.3.4 Operating Temperature : **-40°C to +85°C**

TITLE: **0.5/0.8/1.0MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**RELEASE DATE: **2021/01/20**

REVISION: P

ECN No: **ECN-001592**PAGE: **5** OF **10****5 Performance**

## 5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
<b>ELECTRICAL</b>		
Item	Requirement	Standard
Low Level Contact Resistance	<b>100 m <math>\Omega</math></b> Max. (initial)per contact <b>40 m <math>\Omega</math></b> Max. Change allowed	Mate connectors, measure by dry circuit, <b>20mV</b> Max., <b>100mA</b> Max. (EIA-364-23)
Insulation Resistance	<b>500 M <math>\Omega</math></b> Min.	Unmated connectors, apply <b>500 V</b> DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: <b>2 mA</b> max.	<b>250 VAC</b> Min. at sea level for <b>1</b> minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature rise	<b>30°C</b> Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70, METHOD1,CONDITION1)

Aces P/N: **51503 series**

TITLE: **0.5/0.8/1.0MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: **2021/01/20**

REVISION: P

ECN No: **ECN-001592**

PAGE: **6** OF **10**

### MECHANICAL

Item	Requirement	Standard
Durability	20 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of <b>25.4 ± 3mm/min.</b> (EIA-364-09)
FPC Retention Force	0.03Kgf/Pin MIN	A connector shall be soldered on a board and insert the actuator, pull the FPC at the speed rate of <b>25.4 ± 3 mm/min.</b>
Terminal /Housing Retention Force	0.10kgf MIN.	Operation Speed : <b>25.4 ± 3 mm/minute.</b> Measure the contact retention force with Tensile strength tester.
Fitting Nail /Housing Retention Force	0.20kgf MIN.	Operation Speed : <b>25.4 ± 3 mm/minute.</b> Measure the contact retention force with Tensile strength tester.
Vibration	1 μs Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of <b>10 and 55 Hz.</b> The entire frequency range, from <b>10 to 55 Hz</b> and return to <b>10 Hz</b> , shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μs Max.	Subject mated connectors to <b>50 G's</b> (peak value) <b>half-sine</b> shock pulses of <b>11 milliseconds</b> duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

Aces P/N: **51503 series**

TITLE: **0.5/0.8/1.0MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: **2021/01/20**

REVISION: P

ECN No: **ECN-001592**

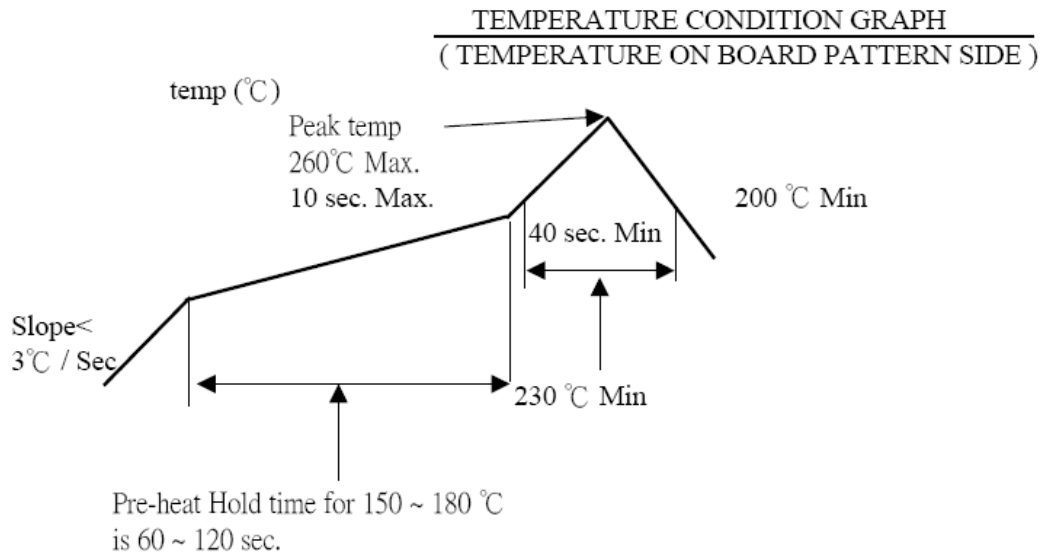
PAGE: **7** OF **10**

### ENVIRONMENTAL

Item	Requirement	Standard
Resistance to <b>Reflow</b> Soldering Heat	See Product Qualification and Test Sequence Group <b>10 (Lead Free)</b>	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max.
Thermal Shock	See Product Qualification and Test Sequence Group <b>4</b>	Mate module and subject to follow condition for 5 cycles. 1 cycles: -55 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group <b>4</b>	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Temperature life	See Product Qualification and Test Sequence Group <b>5</b>	Subject mated connectors to temperature life at <b>85°C</b> for <b>96 hours</b> . (EIA-364-17, Test condition A)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group <b>6</b>	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C <b>(I) Gold flash for 8 hours</b> <b>(II) Gold plating 1 u" for 8 hours.</b> <b>(III) Gold plating 3 u" for 48 hours.</b> <b>(IV) Gold plating 5 u" for 96 hours.</b> (EIA-364-26)
Solder ability	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at <b>245 ±5°C</b> , for <b>4-5 sec.</b> (EIA-364-52)
Hand Soldering Temperature Resistance	Appearance: No damage	T ≥ 350°C, 3sec at least.

**Note.** Flowing Mixed Gas shall be conducted by customer request.

## 6 INFRARED REFLOW CONDITION





Aces P/N: **51503 series**

TITLE: **0.5/0.8/1.0MM PITCH EASY ON FPC CONN. SMT R/A BOTTOM CONTACT TYPE**

RELEASE DATE: **2021/01/20**

REVISION: P


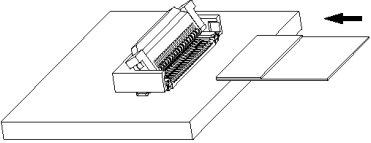




ECN No: **ECN-001592**

PAGE: **9** OF **10**

**7 PRODUCT QUALIFICATION AND TEST SEQUENCE**

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product				1、7	1、6	1、4				1	1
Low Level Contact Resistance		1、5	1、4	2、10	2、9	2、5				3	
Insulation Resistance				3、9	3、8						
Dielectric Withstanding Voltage				4、8	4、7						
Temperature rise	1										
Durability		3									
Vibration			2								
Shock (Mechanical)			3								
Thermal Shock				5							
Humidity				6							
Temperature life					5						
Salt Spray(Only For Gold Plating)						3					
Solder ability							1				
FPC Retention Force		2、4									
Terminal / Housing Retention Force								1			
Fitting Nail /Housing Retention Force									1		
Resistance to Soldering Heat										2	
Hand Soldering Temperature Resistance											2
Sample Size	2	4	4	4	4	4	2	4	4	4	4

## 8 INSTRUCTION UPON USAGE

Operation	Precautions
<p><b>FPC/FFC Termination procedure.</b>  <b>Connector installed on the board.</b></p> <p>1) Lift up the actuator. Use thumb or index finger.</p>  <p>2) Do with the actuator opened completely, and insert it in the interior of the insertion entrance surely when you insert FPC/FFC. There are some insertion resistance because this connector has the FPC/FFC temporary retention mechanism.</p>  <p>3) Rotate down the actuator until firmly closed. It is critical that the inserted FPC/FFC is not moved and remains fully inserted. Should the FPC/FFC be moved, open the actuator and repeat the process, starting with Step 1 above.</p>  <p><b>FPC/FFC Removal</b></p> <p>1) Lift up the actuator.</p> <p>2) Carefully remove the FPC/FFC.</p> 	<p>1) Do when you pull out mating FPC/FFC with the Actuator opened completely. Confirm whether to Have adhered to the terminal contact part before FPC/FFC is mated with the connector housing when the opening of the actuator is the un-complete and FPC/FFC is pulled out.</p>  <p>2) Do not add the load mating FPC/FFC with connector housing.</p>  <p>3) Due to the structure of the connectors, they do not have string resistance to upward pulling; therefore, support the FPC/FFC when a pulling force is applied to it.</p> 